


ISLI Series Single Stage Coaxial UHF Isolator 450-470 MHz



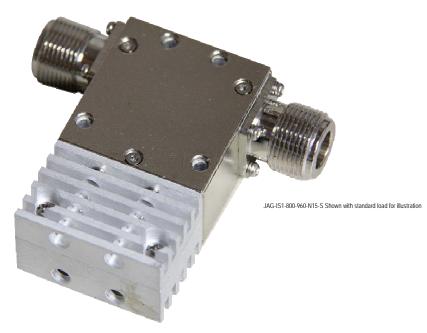

JAG coaxial isolators offer excellent performance in a compact rugged package. Quality components ensure good isolation with low insertion loss over their full operating temperature range. These isolators come equipped with a variety of load terminations. JAG ISLI series coaxial isolators offer a broad selection of frequency ranges and bandwidth from 132MHz-18GHz and from 1% to full bandwidth. Applications of these isolators range from military to space to commercial and are available in high power versions with connector options from N type to SMA. Other options available are integral attenuators and custom designs.

Electrical Specifications			Mechanical Specifications				Environmental		
Model JAG-IS1-450-470-N10-X			Model JAG-IS1-450-470-N10-X			N10-X	Model	JAG-IS1-450-470-N10-X	
Frequency Range (MHz) 4	50-470	*Note 1	Height	inches (mr	n)	3.35 (85)	Temperatu	re Range -30-degC to +60-degC	
Bandwidth @ 1.25:1 VSWR or Better ((MHz) 2	20	Width	inches (mr	n)	2.05 (52)	Notes:		
Maximum Input VSWR 1	1.25:1		Depth inches (mm) 0.875 (22)	ı. D	. Specify model number and exact frequency when ordering				
Maximum FWD Input Power (Watts) 200			Weight	lb (kg)		2 (0.91)	2. Reverse power ratings for isolators are determined by load size with a		
Maximum REV Input Power (Watts) 100			Mounting Systems		19-inch rack mount	maximum going up to 100W 3. Replace the X in the model number			
Maximum Insertion Loss (dB) 0	0.35				Cavity Plate Cabinet Customized		•	for optional loads as follows: S = Standard load (default)	
Minimum Isolation (dB) 2	2 3	*Note 2				•	15 = 15W load 30 = 30W load		
Nominal Impedance (Ω) 5	0		Termination (default) Termination (optional)		N-f N-m/ SMA-f(m)		 60 = 60W load 100 = 100W load Example: JAG-IS1-450-470-N10-15 (comes with a 15W load) 		
Optional Load Sizes (Watts) 1	5 3	*Note 3 *Note 3 *Note 3 *Note 3							
-			Case Code		IC02				
-									

* This is a general representation of what the actual product may look like.


Dated: September-17-2014 Issue: 1



RF EMI Engineering Technology 26-1750 Creek Way Burlington, Ontario L7L 7E2 Canada Email: info@jagelectromagnetics.com Web: www.jagelectromagnetics.com Tel (905)-635-7437 Fax (905)-332-8093



Copyright © JAG Electromagnetics



JAG's dedication to continuous Research & Development will result in product improvements as they evolve.