



Electromagnetics
"Quality is everything."

ISLI Series


Single Stage Coaxial Isolator

470-600 MHz

VHF
UHF



JAG-IS1-470-600-N10-X

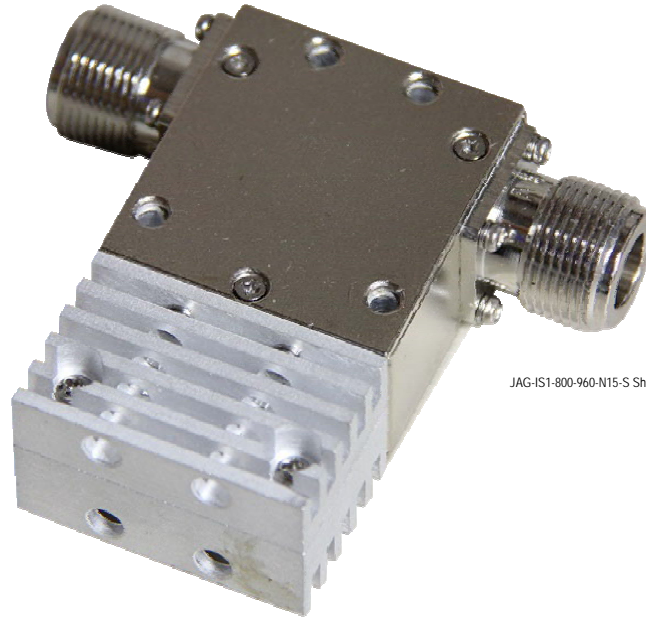

JAG-IS1-900-960-N15-S Shown with standard load for illustration

* This is a general representation of what the actual product may look like.

JAG coaxial isolators offer excellent performance in a compact rugged package. Quality components ensure good isolation with low insertion loss over their full operating temperature range. These isolators come equipped with a variety of load terminations. JAG ISLI series coaxial isolators offer a broad selection of frequency ranges and bandwidth from 132MHz-18GHz and from 1% to full bandwidth. Applications of these isolators range from military to space to commercial and are available in high power versions with connector options from N type to SMA. Other options available are integral attenuators and custom designs.

Electrical Specifications			Mechanical Specifications			Environmental	
Model	JAG-IS1-470-600-N10-X		Model	JAG-IS1-470-600-N10-X		Model	JAG-IS1-470-600-N10-X
Frequency Range (MHz)	470-600	*Note 1	Height	inches (mm)	3.35 (85)	Temperature Range	-30-degC to +60-degC
Bandwidth @ 1.35:1 VSWR or Better (MHz)	130		Width	inches (mm)	2.05 (52)	Notes: 1. Specify model number and exact frequency when ordering 2. Reverse power ratings for isolators are determined by load size with a maximum going up to 100W 3. Replace the X in the model number for optional loads as follows: <ul style="list-style-type: none"> • S = Standard load (default) • 15 = 15W load • 30 = 30W load • 60 = 60W load • 100 = 100W load Example: JAG-IS1-470-600-N10-15 (comes with a 15W load)	
Maximum Input VSWR	1.35:1		Depth	inches (mm)	0.875 (22)		
Maximum FWD Input Power (Watts)	200		Weight	lb (kg)	2 (0.91)		
Maximum REV Input Power (Watts)	100		Mounting Systems	19-inch rack mount			
Maximum Insertion Loss (dB)	0.50			Cavity			
Minimum Isolation (dB)	17	*Note 2		Plate			
Nominal Impedance (Ω)	50		Cabinet				
Optional Load Sizes (Watts)	15	*Note 3	Customized				
	30	*Note 3	Termination (default)	N-f			
	60	*Note 3	Termination (optional)	N-m/ SMA-f(m)			
	100	*Note 3	Case Code	IC02			

JAG-IS1-470-600-N10-X Product Specification Sheet.

Specifications are subject to change without notice. As a result, all information contained in the present datasheet is subject to confirmation at time of ordering.

Dated: September-17-2014

Issue: 1

Made in Canada

Rev091714.0

Page 1/1



RF EMI Engineering Technology
 26-1750 Creek Way
 Burlington, Ontario
 L7L 7E2 Canada

Email: info@jagelectromagnetics.com
 Web: www.jagelectromagnetics.com
 Tel (905)-635-7437
 Fax (905)-332-8093



Copyright © JAG Electromagnetics

JAG's dedication to continuous Research & Development will result in product improvements as they evolve.