



GP1 Series

**Field Adjustable
Ground Plane Antenna
148-174 MHz**

VHF
UHF





Electromagnetics

"Quality is everything."

JAG-GPX-150-0

Tuning Instructions

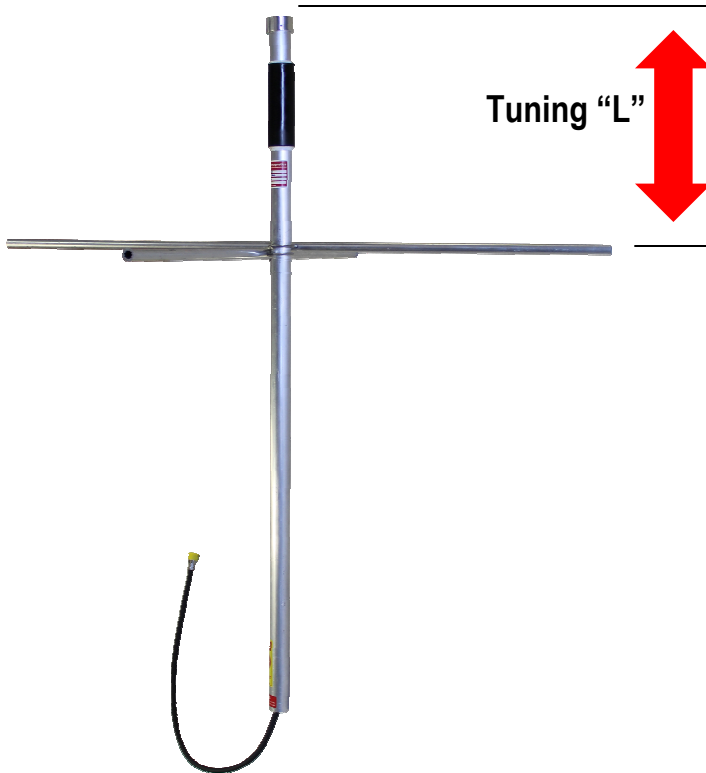

"L"	FREQUENCY
15 7/8	148 MHz
15 5/8	150 MHz
15 3/8	152 MHz
15 3/16	154 MHz
15	156 MHz
14	
11/16	159 MHz
14 1/2	161 MHz
14 1/4	163 MHz
14 1/16	165 MHz
13 7/8	167 MHz
13 3/4	169 MHz
13 9/16	171 MHz
13 7/16	172 MHz
13 3/16	174 MHz
13 3/4	169 MHz
13 9/16	171 MHz
13 7/16	172 MHz
13 3/16	174 MHz

Tools & Parts Required



JAG-GPX-150-0 Product Assembly Sheet.

Specifications are subject to change without notice. As a result, all information contained in the present datasheet is subject to confirmation at time of ordering.

Dated: November-27-2013 Issue: 1

Made in Canada Rev112713.0 Page 1/1



RF EMI Engineering Technology
26-1750 Creek Way
Burlington, Ontario
L7L 7E2 Canada

Email: info@jagelectromagnetics.com
Web: www.jagelectromagnetics.com
Tel (905)-635-7437
Fax (905)-332-8093



Copyright © JAG Electromagnetics

JAG's dedication to continuous Research & Development will result in product improvements as they evolve.